






51.2V 16S LiFePO₄ BATTERY Wall-Mounted 10kWh

- 
51.2V
- 
5.12kW
- 
10.24kWh
- 
IP20




Ultra-thin
Smart Connection
High Capacity
10 Years Warranty

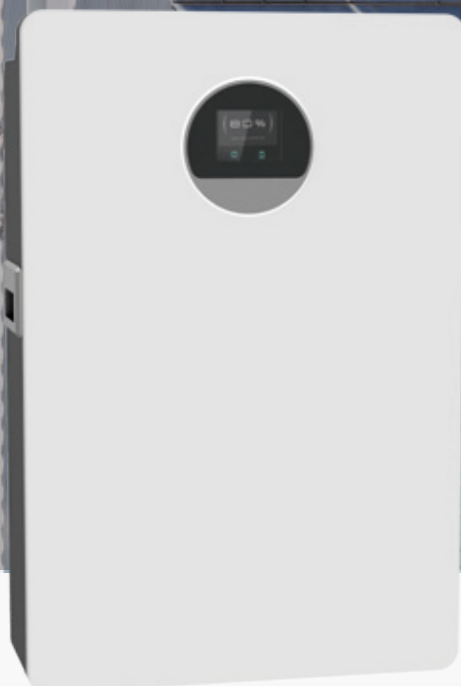CE UN38.3 MSDS IEC62619

Maximum 16 units Paralleling

Up to 160kWh Energy Storage

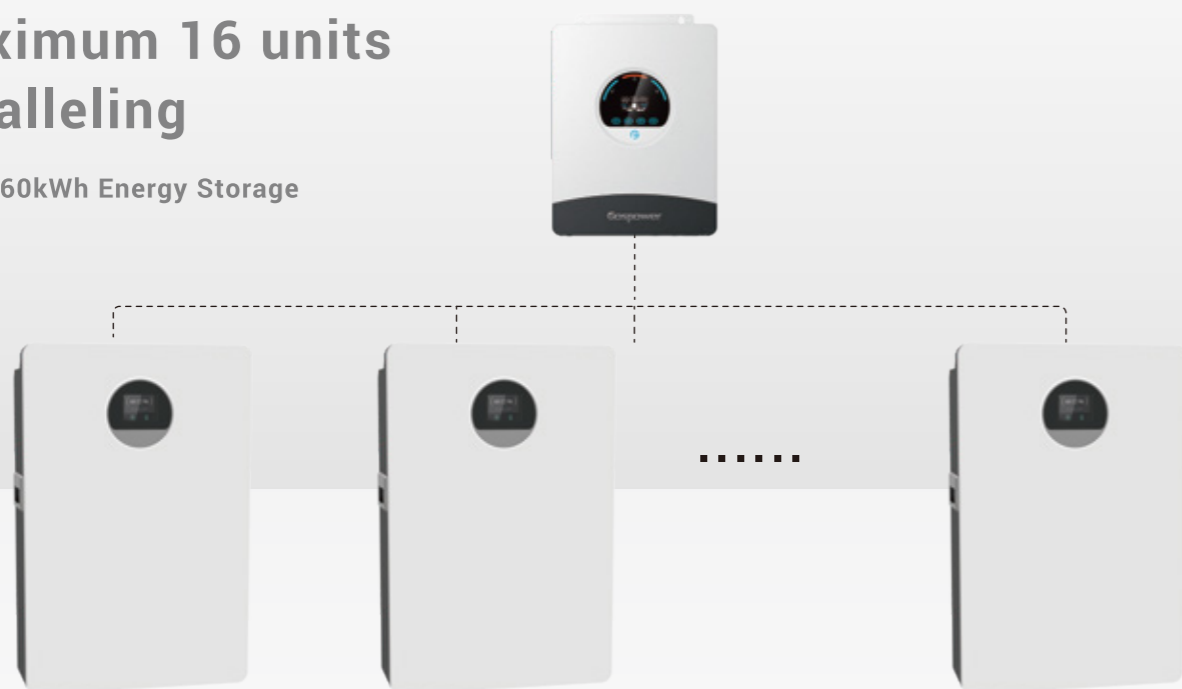

ENERGY STORAGE BATTERY




GPLB-48200M
Wall-mounted 51.2V 200Ah

» Key Features

- Plug-in terminal design, fast installation available
- Under voltage automatically restart
- Easy maintenance
- High power charging/discharging @ 6000 cycles
- Standard protocols & user-defined protocols

» Package Info

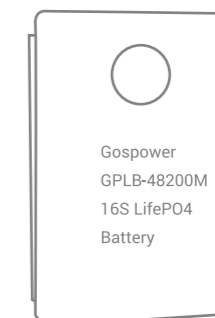

Product Size
535*485*200

Packing Size
585*535*250

» Specifications

	GPLB-48200M
Nominal Energy (kWh)	10.24
Nominal Voltage (V)	51.2
Nominal Capacity (Ah)	200
IP Rating	IP 20
Output Power (kW)	5.12
Voltage Range (V)	43.2~58.4
Charge Voltage (V)	56.8~58.4
Charge Current (A)	100
Discharge Current (A)	100
Charge Mode	CC-CV
Communication	CAN/ RS485/ RS232
Charge Temperature	0 - 55 °C
Discharge Temperature	-20 - 55 °C
Designed Life	10+ Years
Cycle Life	> 6000 (@25°C, 80% DOD)
Weight (kg)	45